



157S 内側溝入れ




x)157S ホルダはホルダの勝手 (R157S、L157S) と逆勝手のクランプ (SHL、SHR) が付きます。

NEW カットピアによる日本生まれの新しいホルダ (型番末尾 N)


- ・ミルコーナ製と同等以上の品質で、価格を抑えました。
- ・ミルコーナと互換性があり、ミルコーナ/カットピアインサートが使用可能。

適用インサート	型番 L157S R157S 型番末尾 N : CUTPIA	在庫	単価	寸法 (mm)						クランプ		クランプ スクリュー	スプリング	レンチ
				D ₁ min	H	B	L	L ₁	B ₁	L157S用 SHR	R157S用 SHL			
3	R/L 157S-2525x20x3	◎	52,780	80	25	25	160	20	3	ⓧSHR203M	ⓧSHL203M	F6S418	BF04M	NY2.5
	R/L 157S-2525x20x3N	◎	41,310	80	25	25	160	20	3	ⓧSHR203MN	ⓧSHL203MN	F6S416	BF04N	T20
4	R/L 157S-2520x20x4	◎	52,780	80	25	20	160	20	4-4.5	ⓧSHR204MT	ⓧSHL204MT	F6S418	BF04M	NY2.5
	R/L 157S-2520x20x4N	◎	41,310	80	25	20	160	20	4-4.5	ⓧSHR204MTN	ⓧSHL204MTN	F6S416	BF04N	T20
5	R/L 157S-2520x20x5	◎	52,780	80	25	20	160	20	5	ⓧSHR205MT	ⓧSHL205MT	F6S418	BF04M	NY2.5
	R/L 157S-2520x20x5N	◎	41,310	80	25	20	160	20	5	ⓧSHR205MTN	ⓧSHL205MTN	F6S416	BF04N	T20
	R/L 157S-3220x25x5	○	64,040	90	32	20	200	25	5	ⓧSHR255MT	ⓧSHL255MT	F6S418	BF04M	NY2.5
	R/L 157S-3220x25x5N	○	50,120	90	32	20	200	25	5	ⓧSHR255MTN	ⓧSHL255MTN	F6S416	BF04N	T20
6	R/L 157S-2020x20x6		51,390	80	20	20	160	20	6-7.5	ⓧSHR206MT	ⓧSHL206MT	F6S418	BF04M	NY2.5
	R/L 157S-2020x20x6N		40,220	80	20	20	160	20	6-7.5	ⓧSHR206MTN	ⓧSHL206MTN	F6S416	BF04N	T20
	R/L 157S-3220x20x6	◎	54,450	90	32	20	200	20	6-7.5	ⓧSHR206MT	ⓧSHL206MT	F6S418	BF04M	NY2.5
	R/L 157S-3220x20x6N		42,610	90	32	20	200	20	6-7.5	ⓧSHR206MTN	ⓧSHL206MTN	F6S416	BF04N	T20
	R/L 157S-3225x25x6	○	64,040	90	32	25	200	25	6-7.5	ⓧSHR256MT	ⓧSHL256MT	F6S418	BF04M	NY2.5
	R/L 157S-3225x25x6N		50,120	90	32	25	200	25	6-7.5	ⓧSHR256MTN	ⓧSHL256MTN	F6S416	BF04N	T20
8	R/L 157S-2525x20x8		59,310	120	25	25	200	20	8-9	ⓧSHR208MT	ⓧSHL208MT	F6S519	BF05M	NY3
	R/L 157S-2525x20x8N		46,420	120	25	25	200	20	8-9	ⓧSHR208MTN	ⓧSHL208MTN	F6S518	BF05N	T25
	R/L 157S-3220x20x8		61,100	120	32	20	200	20	8-9	ⓧSHR208MT	ⓧSHL208MT	F6S519	BF05M	NY3
	R/L 157S-3220x20x8N		47,820	120	32	20	200	20	8-9	ⓧSHR208MTN	ⓧSHL208MTN	F6S518	BF05N	T25
	R/L 157S-4025x20x8		84,500	120	40	25	250	20	8-9	ⓧSHR208MT	ⓧSHL208MT	F6S519	BF05M	NY3
	R/L 157S-4025x20x8N		59,340	120	40	25	250	20	8-9	ⓧSHR208MTN	ⓧSHL208MTN	F6S518	BF05N	T25
10	R/L 157S-3232x30x10		72,500	120	32	32	250	30	10-11	ⓧSHR3010MT	ⓧSHL3010MT	F6S519	BF05M	NY3
	R/L 157S-3232x30x10N		56,740	120	32	32	250	30	10-11	ⓧSHR3010MTN	ⓧSHL3010MTN	F6S518	BF05N	T25
	R/L 157S-4025x30x10		94,300	120	40	25	250	30	10-11	ⓧSHR3010MT	ⓧSHL3010MT	F6S519	BF05M	NY3
	R/L 157S-4025x30x10N		63,910	120	40	25	250	30	10-11	ⓧSHR3010MTN	ⓧSHL3010MTN	F6S518	BF05N	T25
12	R/L 157S-4040x30x12		113,000	140	40	40	250	30	12	ⓧSHR3012MT	ⓧSHL3012MT	F6S519	BF05M	NY3
	R/L 157S-4040x30x12N		82,070	140	40	40	250	30	12	ⓧSHR3012MTN	ⓧSHL3012MTN	F6S518	BF05N	T25


◎：左右両勝手在庫 ○：右勝手のみ在庫 空欄：メーカー（海外）または受注生産

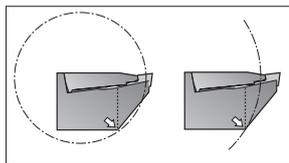

157S タイプホルダはワーク径により加工可能な溝入れ深さが異なります。より深く加工したい場合は干渉部をグラインダなどで落としてください。(右表参照)




レンチ以外のパーツはホルダに付属しています。

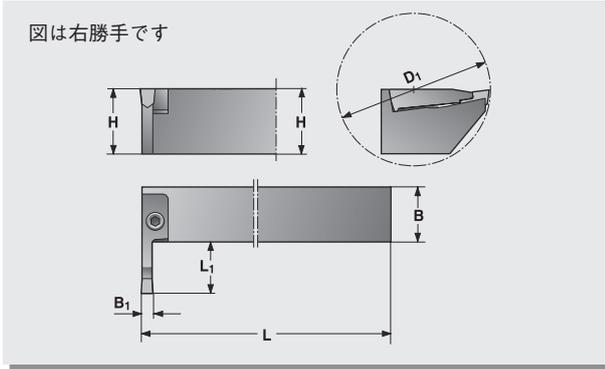

157S タイプホルダ 加工内径(D₁)と最大溝入れ深さ(Ar max) (技術資料)

ホルダ 型番末尾 N : CUTPIA	D ₁ min	加工内径 (mm)												
		80	90	100	110	120	130	140	150	160	170	180	190	200
R/L 157S-2525x20x3	80	11	12	13	13	14	15	15	15	15	16	16	16	16
R/L 157S-2525x20x3N		11	12	13	13	14	15	15	15	15	16	16	16	16
R/L 157S-2520x20x4	80	11	12	13	13	14	15	15	15	15	16	16	16	16
R/L 157S-2520x20x4N		11	12	13	13	14	15	15	15	15	16	16	16	16
R/L 157S-2520x20x5	80	11	12	13	13	14	15	15	15	15	16	16	16	16
R/L 157S-2520x20x5N		11	12	13	13	14	15	15	15	15	16	16	16	16
R/L 157S-3220x25x5	90	-	11	13	14	15	16	17	17	18	18	19	19	19
R/L 157S-3220x25x5N		-	11	13	14	15	16	17	17	18	18	19	19	19
R/L 157S-2020x20x6	80	14	15	15	16	16	16	17	17	17	17	17	17	17
R/L 157S-2020x20x6N		14	15	15	16	16	16	17	17	17	17	17	17	17
R/L 157S-3220x20x6	90	-	6	8	9	10	11	12	12	13	13	14	14	14
R/L 157S-3220x20x6N		-	6	8	9	10	11	12	12	13	13	14	14	14
R/L 157S-3225x25x6	90	-	11	13	14	15	16	17	17	18	18	19	19	19
R/L 157S-3225x25x6N		-	11	13	14	15	16	17	17	18	18	19	19	19
R/L 157S-2525x20x8	120	-	-	-	-	14	15	15	15	15	16	16	16	16
R/L 157S-2525x20x8N		-	-	-	-	14	15	15	15	15	16	16	16	16
R/L 157S-3220x20x8	120	-	6	8	9	10	11	12	12	13	13	14	14	14
R/L 157S-3220x20x8N		-	6	8	9	10	11	12	12	13	13	14	14	14
R/L 157S-4025x20x8	120	-	-	-	-	4	6	7	8	9	10	10	11	11
R/L 157S-4025x20x8N		-	-	-	-	4	6	7	8	9	10	10	11	11
R/L 157S-3232x30x10	120	-	-	-	-	20	21	22	22	23	23	24	24	24
R/L 157S-3232x30x10N		-	-	-	-	20	21	22	22	23	23	24	24	24
R/L 157S-4025x30x10	120	-	-	-	-	14	16	17	18	19	20	20	21	21
R/L 157S-4025x30x10N		-	-	-	-	14	16	17	18	19	20	20	21	21
R/L 157S-4040x30x12	140	-	-	-	-	-	-	17	18	19	20	20	21	21
R/L 157S-4040x30x12N		-	-	-	-	-	-	-	17	18	19	20	20	21



例:157S-2525 × 20 × 3 を使用して φ 100 の内径に溝入れをする場合、深さ 13mm までの溝入れが可能です。